SE2142 · SOFTWARE ENGINEERING TOOLS AND PRACTICES

FORM

A strength-training app that remembers what you lifted — and only what you lifted.

Final project documentation: the problem, the product, the engineering decisions behind it, and the evidence that they work.

Log the workout. See the progress. Beat yourself — by one.

APPLICATION	FORM — `com.swcidd.form`
GROUP	letmesolothis
SUBMITTED BY	Sherwin Sid S. Sañol
COURSE · SECTION	SE2142 · BSSE-2
REPOSITORY	github.com/swcidd/form
DATE	19 October 2026

SECTION 01

MEMBER ROLES

FORM was built by one member, so the table below is not a division of labour between people — it is the set of roles the project actually required, what each one was responsible for, and where the evidence of it lives in the repository.

ROLE	RESPONSIBILITIES	WHERE TO LOOK
Design and interface	Translated the Figma design system into a Flutter theme (colour, type scale, control shapes), laid out eleven screens, and built the reusable widgets they share. Kept one voice for empty, loading and error states.	`lib/screens/`, `lib/widgets/`, `lib/theme/`
State management	Two `ChangeNotifier` providers, the derived figures the screens read, the per-account store lifecycle, and the rule that screens read state rather than mutate it.	`lib/providers/`
Data layer and schema	The SQLite schema (version 4), the migration that gave every row an owner, the repository that scopes reads and writes to one account, and the statistics file that derives progress.	`lib/data/`
Authentication	The `AuthRepository` seam, the local implementation, PBKDF2 hashing off the UI isolate, session restore, sign-out and account deletion.	`lib/auth/`, `docs/AUTH.md`
API integration	The wger REST client over `http`, the JSON-to-model mapping, the network-first/offline-fallback policy, and the loading, success and error states that expose it.	`lib/data/exercise_api_client.dart`, `exercise_catalog.dart`
Quality assurance	286 automated tests across models, providers, persistence and widgets; a hand-built v3 database for the migration test; screenshots rendered as golden files; `dart format` and `flutter analyze` kept clean at every commit.	`test/`, `tool/screenshot_test.dart`
Git and repository management	Branch pipeline, conventional commit messages, pull requests with review comments, issue tracking, and promotions through staging to master.	Pull requests and issues on GitHub
Documentation	README, authentication design note, build guide, branding note, attribution and licences, the DevTools case study, and this paper.	`README.md`, `docs/`

Because the roles were held by one person, the value of separating them is not coordination but review: each role produced an artefact the others could check. The interface role produced screenshots; the QA role compared them and found that the dashboard and the library disagreed about the week (Section 6). The API role produced a fallback catalogue; the QA role asserted that a failed request still renders a usable screen. The data role produced a migration; the QA role built a version-3 database by hand and migrated it, because a test that rewinds `user_version` on a current database only proves that the migration runs, not that it is correct.

WORKING METHOD

Work moved through four branches: `feat/*` for features, `dev` as the integration branch, `staging` for what is about to be released, and `master` for what was released. Every feature arrived as a pull request with review comments on the lines that carried a decision, not on formatting. Every commit was required to be green on its own — formatter, analyzer and the full test suite before the commit was made — so that a bisect never lands on a broken tree.

SECTION 02

PROBLEM STATEMENT

Strength training only works if the load goes up, and the load can only go up if the lifter knows what it was last time. That single fact is the whole problem: the numbers that matter are the ones nobody can remember.

THE PROBLEM

Progressive overload — doing a little more than last time — is the mechanism by which training produces strength. It requires a comparison: this week's bench press against last week's. Most people training in a gym carry that comparison in their head, or in a notes app, or on a paper card that stays in the car. Memory is unreliable under fatigue, and a note that records “bench 3×8” without the weight cannot answer the only question the next set asks.

The apps that solve this tend to solve several other things at once. They ask for an account before showing a screen, sync to a cloud the user cannot inspect, fill the dashboard with step counts and calorie estimates, and add social surfaces that turn a training log into a feed. Each addition is another thing that can be wrong, another number that was invented rather than measured, and another reason the app needs a network to open.

WHY IT MATTERS

- **Without a record there is no overload.** A lifter who cannot see last week's weight either repeats it or guesses upward; both waste sessions.
- **Progress is invisible in the short term.** A single session rarely feels easier; a month of volume does not feel different. Only a comparison makes the change visible, which is what keeps people training.
- **Trust is easy to lose.** One fabricated figure — a personal record nobody earned, a duration nobody measured — teaches the user to distrust every other number on the screen.
- **Gyms have poor signal.** A logging app that needs the network fails exactly where it is used.

CURRENT CHALLENGES

Existing trackers are either heavy or thin. The heavy ones require an account and a cloud, which makes an offline demo impossible; the thin ones are note fields with a stopwatch, which cannot compute a record or a weekly comparison. Both leave the same gap: a fast log, a truthful summary, and a progress view derived from what was actually performed.

TARGET USERS

FORM is for the beginner-to-intermediate lifter training three or four times a week, who wants to log a session in under a minute and see an honest picture of the last month. It is also for the privacy-minded user who does not want an account to lift, and for the student who needs the app to work on a phone with no data plan. All three pull in the same direction: local first, account optional, no invented numbers.

SECTION 03

APPLICATION OVERVIEW

FORM is a Flutter application for logging strength training and reading progress from the log. It ships empty, works offline, and every figure it prints can be traced back to a session the user recorded.

Repository: https://github.com/swcidd/form — public, with the full commit history, pull requests and reviewed changes.

WHAT IT IS

The app has eleven screens. A first launch offers a welcome with three ways in: create an account, sign in, or continue offline as the device account. Behind that front door is a shell with five destinations — Home, Progress, Workout, Library and Profile — plus three screens reached from a session: the workout detail, the set logger and the summary.

A session is a plan: exercises, each with sets of reps and weight. The user ticks sets as they are performed, and the session finishes when the last set is ticked. Home shows the session to walk into next, the week's target and the most recent sessions. Progress derives records, volume and consistency from finished sessions only. The Library holds the user's rotation and a searchable catalogue of exercises, read from the public wger API when the device is online and from a bundled set when it is not.

HOW IT WORKS, IN THE ORDER A USER MEETS IT


1. **Open.** No session? The welcome. A session? The app, on the account that owns it.
2. **Home.** “Up next” names today's session and how much of it is done; the week shows finished sessions against the goal; recent sessions show what happened.
3. **Log.** Ticking the last planned set closes the session. Unticking one reopens it. Every tap writes through a repository to SQLite.
4. **See.** The summary turns the session into volume, duration, sets, reps and — only if it really beat one — a record.
5. **Reflect.** Progress ranks records by estimated one-rep max, compares this month's volume with last month's, and measures consistency over thirty days.

ONE RULE, APPLIED EVERYWHERE


Only finished sessions count, and inside them only completed sets. A set that was planned and never ticked is work nobody did; counting it would let a routine nobody performed move every number in the app.

THE SCREENS

Screenshots are rendered from the app's own widgets by `tool/screenshot_test.dart` with a sample account loaded. FORM ships with no training data: the empty-account screenshot is what a fresh install shows.

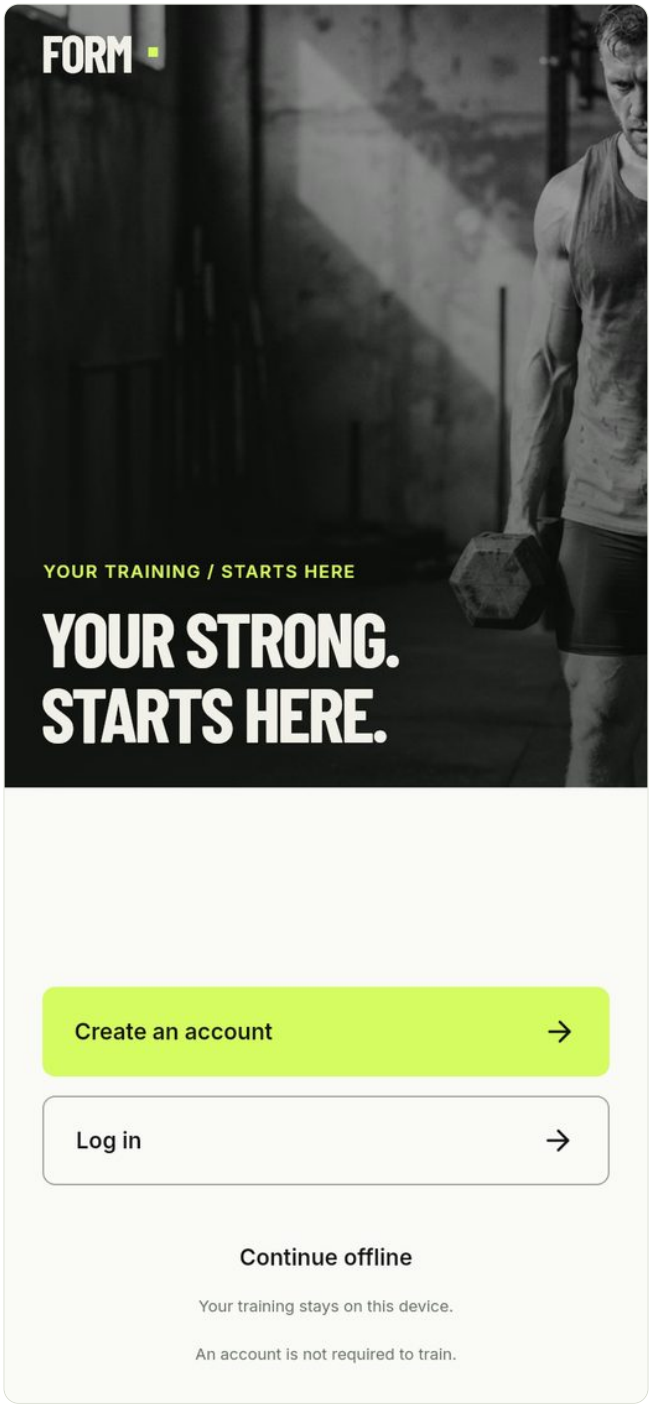


Welcome
Three ways in; the third needs no account.

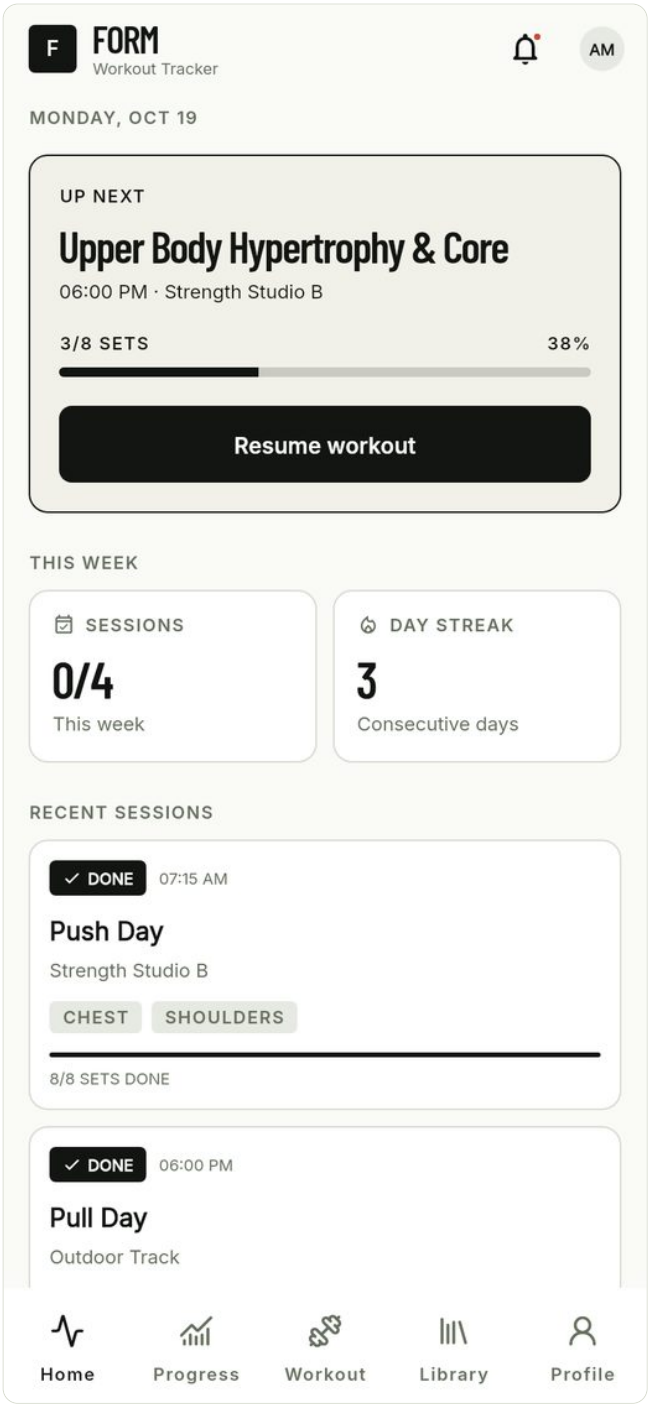

Home
The session to walk into, the week, and what happened last.




Progress
Records, volume change and consistency, all derived.

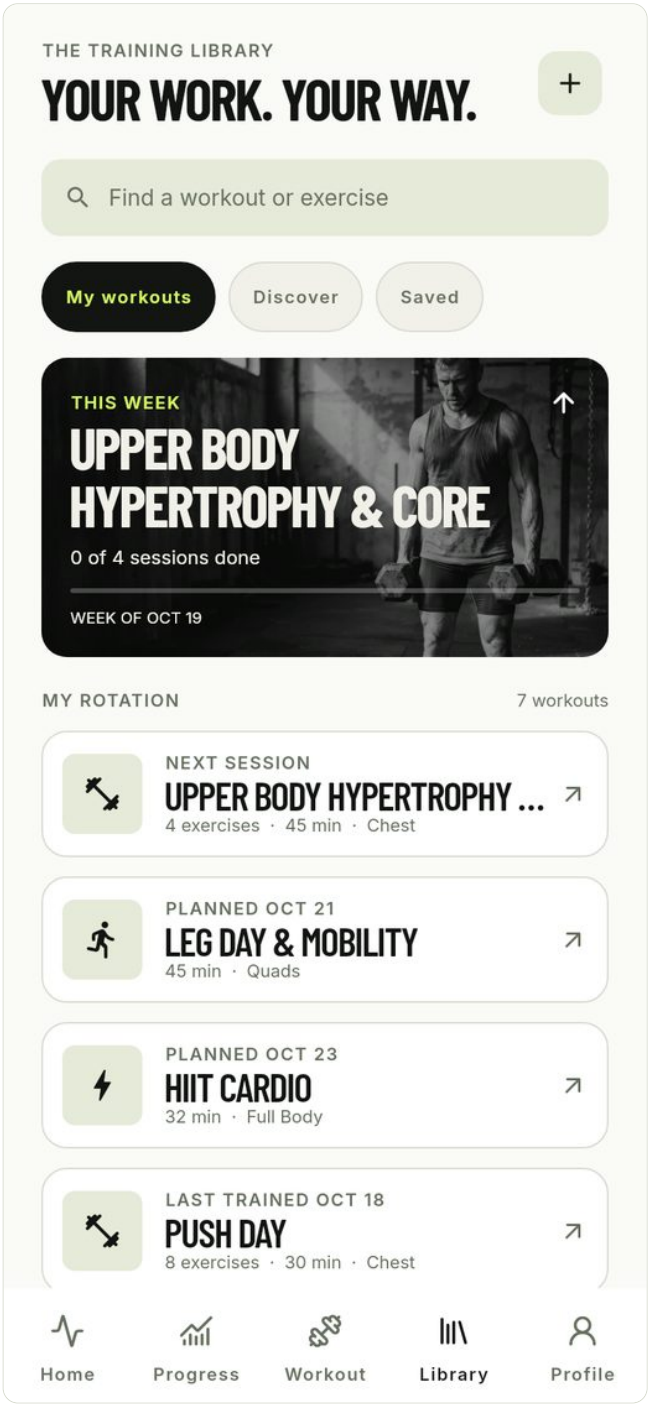


Library
The rotation, and a catalogue behind a search field.




Profile
The week's target, body metrics and the account.

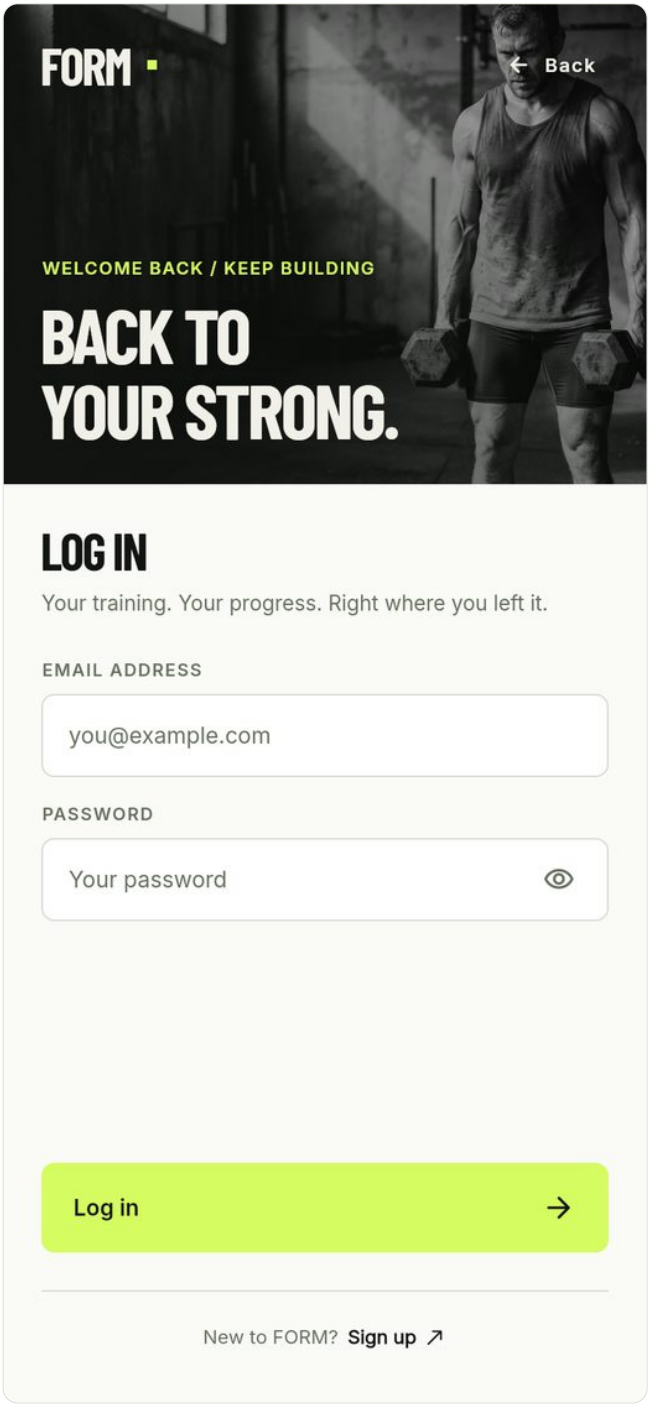


Sign in
Local accounts; the failure never says which half was wrong.

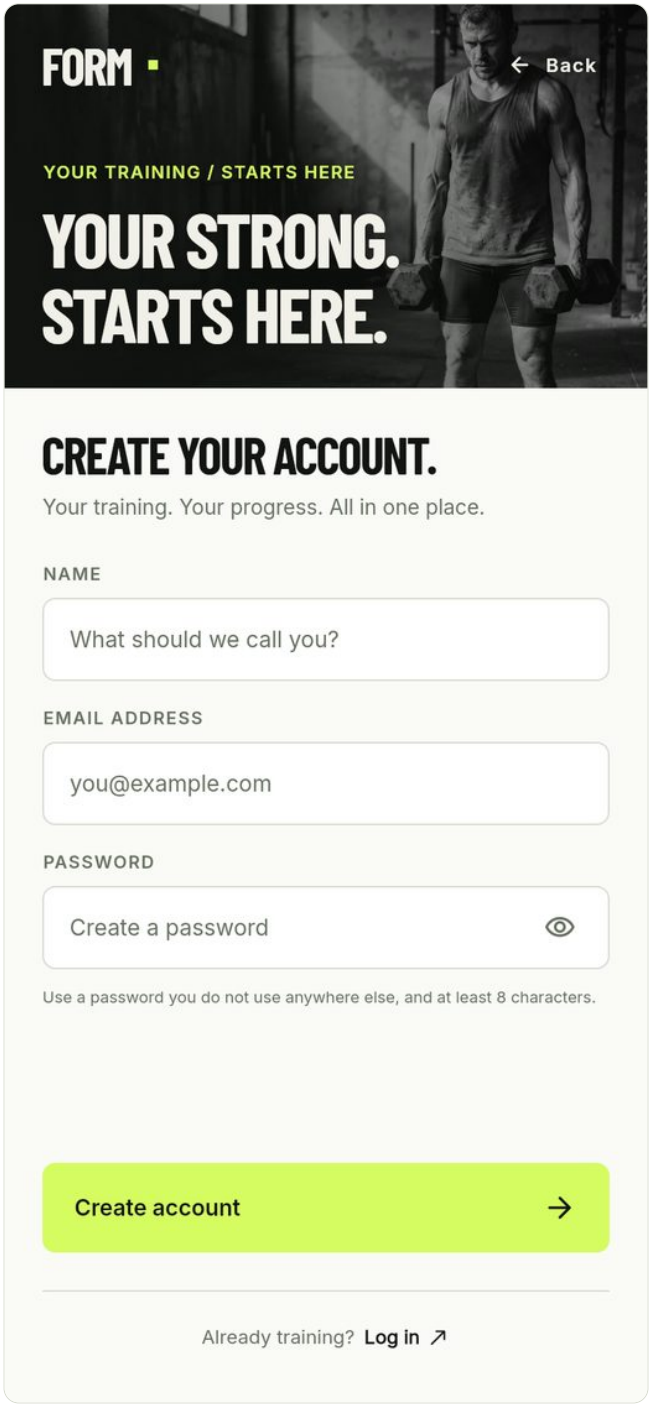


Create account
The design's three steps, collapsed into one screen.

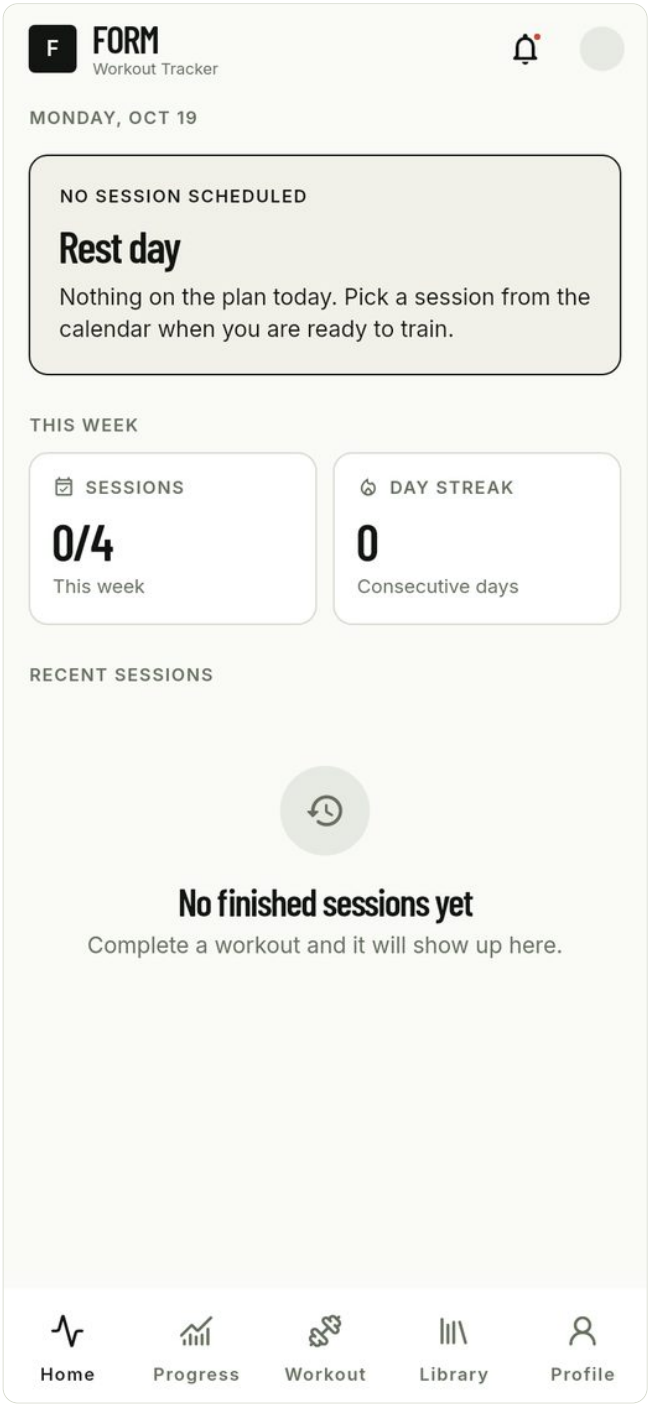


Empty account
What a fresh install shows: an invitation, not zeros.

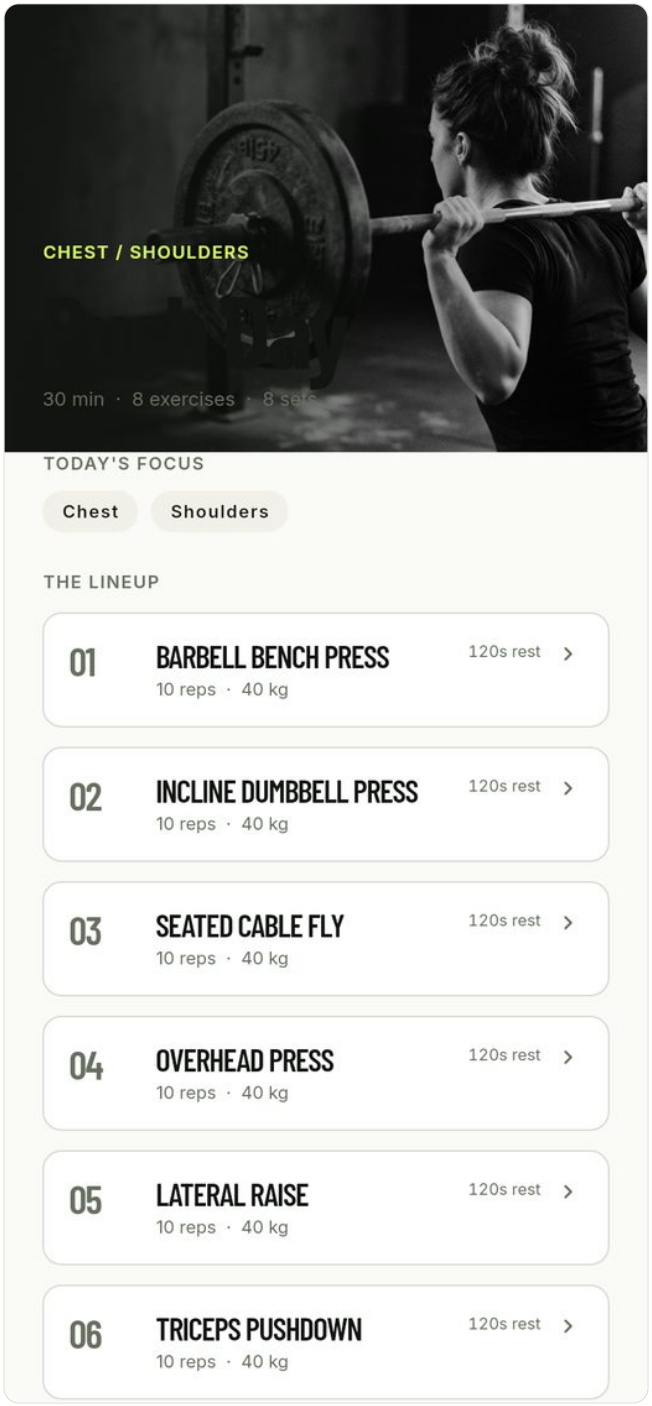


Workout
The plan, its focus and equipment, and where it is.

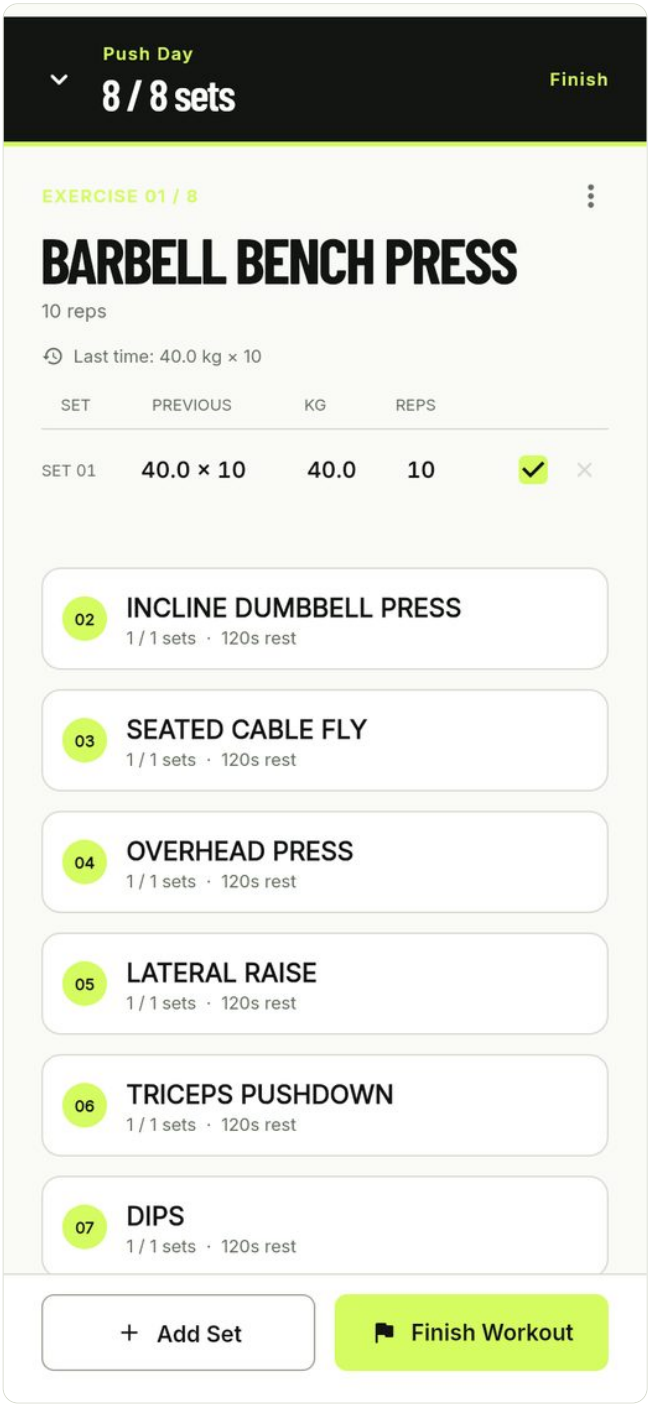

Logging
One set at a time, with last time's numbers beside it.

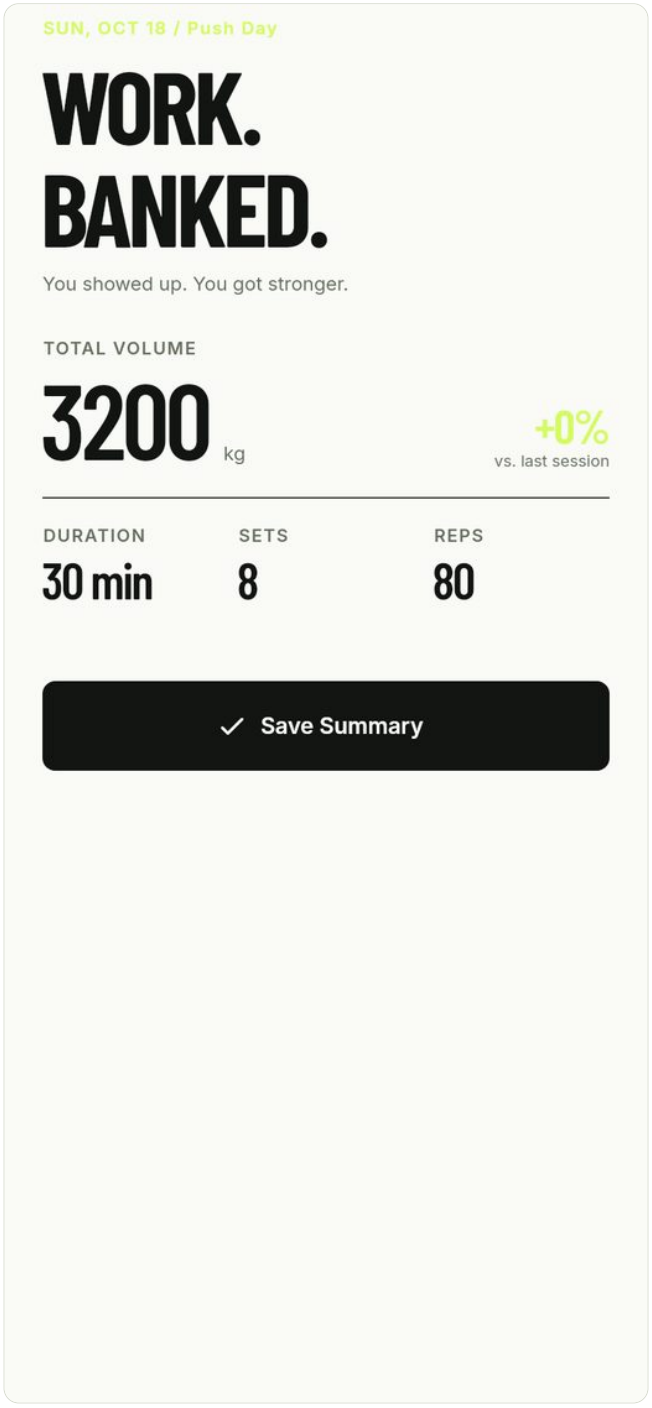

Summary
What the session was worth, and a record only if it beat one.

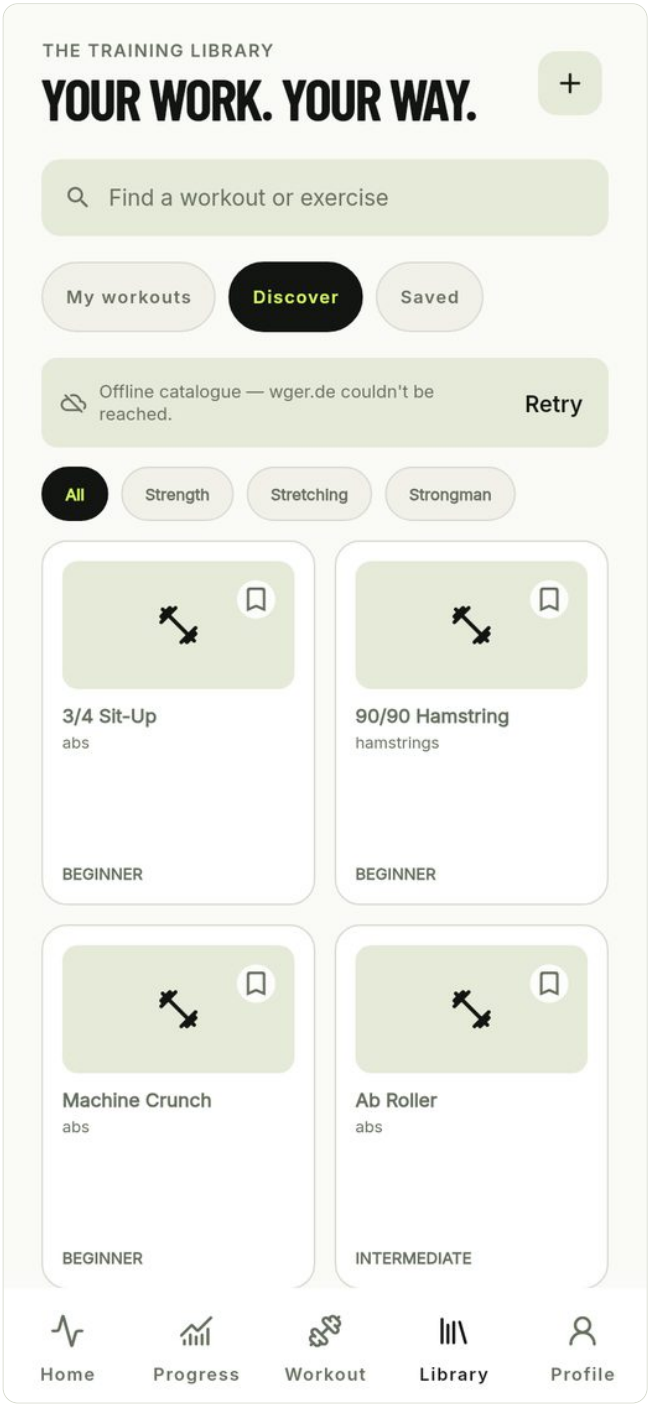

Discover
The network failing on purpose: banner, then the bundled catalogue.

SECTION 04

PROPOSED SOLUTION

The concept is one sentence long: **the app remembers, so the user can progress**. Everything below follows from taking that sentence literally — a memory that is durable, private and honest, and a view of it that answers the next question.

THE IDEA

FORM treats the training log as the only source of truth. A session, its exercises and its sets are stored; every other number in the app is computed from them on read. Nothing is stored twice, so nothing can go stale, and there is no “demo data” to explain away. An empty account is empty: the app says so and offers the first session, rather than printing a scoreboard of zeros.

THE WORKFLOW

STEP	WHAT HAPPENS	WHAT IT IS BUILT ON
1. Enter	Continue offline or sign in. The chosen account owns everything that follows.	The auth seam and a per-account store
2. Pick	Home names the session to walk into: the soonest planned session in this week that is not behind the user.	`focusWorkoutThisWeek`
3. Log	Each exercise shows its sets, the last time it was trained, and a tick per set. The tick is the record.	`toggleSet`, `previousSetsFor`
4. Finish	The last tick closes the session; the summary reports volume, sets, reps and any record.	`SessionStats`
5. Reflect	Progress shows records ranked by estimated one-rep max, volume against the previous window, and consistency.	`lib/data/session_stats.dart`
6. Extend	The Library adds sessions to the rotation and exercises to a saved list, using the live catalogue or the bundled one.	`ExerciseCatalog`, saved exercises

HOW THE TECHNICAL CHOICES SUPPORT IT

Provider, so a number has one owner

`WorkoutProvider` holds the account's sessions and exposes derived getters — the week's sessions, the streak, the session to walk into, the last time an exercise was trained. Screens watch the provider and read those getters; they never compute a shared figure themselves. This is the choice that made the week bug in Section 6 possible to find: two screens disagreeing meant two definitions existed, and the fix was to delete one and keep the other in the provider.

SQLite behind a repository, so memory survives the process

Every write goes through `WorkoutRepository`, which is constructed with a `userId` and cannot read or write a row without one. The in-memory copy is treated as a cache: it is loaded before the first frame, and writes are applied to it immediately and persisted behind it. A restart is therefore an ordinary event, not a data-loss risk.

An HTTP client behind a policy, so the network is an enhancement

The catalogue is loaded by `ExerciseCatalog`, which asks wger first and falls back to the bundled sets when the request fails, times out or returns nothing. Screens see one result type with a flag saying where it came from, so the offline case is a banner rather than an error screen.

Accounts without a server, so the demo works without wifi

Sign-in is local, behind an interface shaped like a server (`AuthRepository`). Passwords are hashed with PBKDF2-HMAC-SHA256 on a worker isolate. A real backend could replace the implementation without a screen changing, and the project avoids shipping a Firebase configuration file in a public repository, which would be a credential in the APK.

Empty and error states as first-class screens

A new account, a failed request, an unknown session id and an invalid field all have a written answer. None of them is a blank screen and none is a fabricated value.

WHAT THE SOLUTION REFUSES TO DO

No cloud sync, no social features, no vitals or calorie tracking. These are recorded as deliberate cuts in the README, and the reasoning is the same in each case: a surface with nothing behind it is a promise the app cannot keep.

SECTION 05

GOALS AND OBJECTIVES

Six objectives, each with the thing that would show it had been met. They are stated as outcomes rather than features because the project is graded on what the app can demonstrate, not on how much code it contains.

#	OBJECTIVE	EVIDENCE THAT IT WAS MET
1	**Make a session loggable in under a minute.** The plan arrives with its sets, and each exercise shows what it was lifted at last time, so the user confirms rather than types.	The logging screen's PREVIOUS column and “Last time” line are computed from the store; a session of eight exercises needs eight ticks.
2	**Make every figure traceable.** Any number on any screen can be recomputed from the sessions the user recorded.	`lib/data/session_stats.dart` is the only place progress is computed, and its tests assert the counting rules directly.
3	**Work without a network.** Training and browsing the catalogue both survive a dead connection.	The bundled catalogue renders behind an “offline catalogue” banner with a retry; the Discover screenshot in Section 3 is that path.
4	**Support accounts without a server.** Two people can use one device with separate training, and no credential ships in the app.	Schema v4 gives every row an owner; switching accounts opens a different store and disposes the previous one; passwords are hashed, salted and iterated.
5	**Be release-ready.** Custom name, icon and splash; a working release APK; the steps written down.	`docs/BUILD.md`, the generated launcher icon and splash, and the APK built from `master`.
6	**Practise the engineering, not only the programming.** Branches, reviewed pull requests, issues, tests, a DevTools case, and documentation a stranger can follow.	More than thirty merged pull requests with inline review comments, ten issues closed, 286 tests, `docs/DEVTOOLS.md`.

NON-GOALS

The project did not aim to be a social product, a nutrition tracker or a cloud service. It also did not aim for visual parity with every frame in the design file: the design's sign-up flow has three steps, and the delivered screen collapses them into one because the app has no age column and no reader for it. That deviation is documented rather than hidden, which is the standard the rest of the project is held to.

SECTION 06

FEATURES

Every feature below is demonstrable in the running app. Where a screen needs a behaviour that is easy to fake — a record, a comparison, a streak — the feature section says what the number is derived from.

CORE FEATURES

FEATURE	WHAT IT DOES	WHERE
Session logging	Exercises with sets of reps and weight; a tick per set; the last tick closes the session, unticking reopens it.	`set_logging_screen.dart`
CRUD	Create, rename, reschedule and delete sessions; add and remove sets; edit the profile and body metrics; save and unsave exercises.	`workout_provider.dart`, `workout_repository.dart`
Progress from the log	Records ranked by estimated one-rep max, volume with the change against the previous window, and thirty-day consistency.	`session_stats.dart`
Last time's numbers	The logger shows the best set from the most recent finished session containing that exercise, and each row shows the matching set.	`previousSetsFor`
Weekly goal and streak	Finished sessions against a target the user can raise or lower; consecutive days with a finished session.	`sessionsDoneThisWeek`, `streakDays`
Exercise catalogue	Live wger data over `http` with search, muscle filters and a saved list; bundled fallback offline.	`exercise_catalog.dart`, `library_screen.dart`
Accounts	A local account with a hashed password or the device account; per-account training; sign out; delete with confirmation.	`lib/auth/`, schema v4

SUPPORTING BEHAVIOUR

- **Validation** — field-level messages under the field, and a single failure vocabulary for sign-in: an unknown address and a wrong password produce the same message and take the same time to compute.
- **Empty states** — an empty account gets a first-session panel and “other ways to start”; an empty progress tab says what will appear rather than showing zeros.

- **Error states** — a failed catalogue request renders a banner with a retry; a session id that is not in the store says “Session not found” instead of inventing one.
- **Theming** — one palette and one type scale, applied through the theme rather than per screen.

REUSABLE WIDGETS

The assignment asks for at least three custom widgets used on more than one screen. FORM has eighteen; the ones that carry the most weight are:

WIDGET	USED BY	WHAT IT HIDES
`AppNavBar`	All five tab screens	Five destinations, the raised centre action, and the selected state.
`SectionHeader`	Home, progress, library, profile	The small-caps section label and its spacing.
`WorkoutCard`	Home, library, profile	The status chip, the muscle tags, the progress rule and the date formatting.
`EmptyState`	Home, progress, library	The icon, title and explanation that replace a blank list.
`AuthField`	Sign in, create account	Label, obscure toggle, error text and focus behaviour.
`AuthAction`	Welcome, sign in, create account	The busy state that disables the button and shows a spinner.
`MetricTile` / `StatTile`	Home, progress, profile	The value, unit and caption layout of a statistic.

WHAT THE SCREENSHOTS EXPOSED

Rendering every screen for this paper found two defects that code review had not, both of the same kind: a number that had been invented rather than derived.

The week disagreed with itself. Home read the length of the week's session list and the library counted finished sessions, so a week holding four plans and no training showed `4/4` on the dashboard and `0 of 4 sessions done` in the library. The fix was to define the number once, next to the window it counts (`sessionsDoneThisWeek`), and have all three places read it.

The PREVIOUS column was a placeholder. The logging screen drew a “previous” column and a “No previous data” line from fields nothing ever wrote, so every exercise claimed to be new. It now asks the store for the completed sets of the last finished session containing that exercise — a feature that could not be tested before, because the fixtures named their exercises `Push Day Movement 4` and no name ever repeated.

Both screenshots in Section 3 were rendered after the fix: the weekly tile and the library's week card read the same getter, and the logger's PREVIOUS column is filled from the store.

SECTION 07

TECHNICAL IMPLEMENTATION

Three areas carry the course: navigation, state management and API integration. For each one this section states what the app needed, how it was built — naming the files and classes — and what would be harder or broken without it.

7.1 NAVIGATION

What the app needed

Four kinds of movement: between the five destinations of the shell without rebuilding the app; from a list into a session, where the destination depends on an id; from a session into a logger and then a summary, without the user being able to walk back into a logger for a session that is already finished; and between entirely different windows when the user signs in or out.

How it was built

The destinations are an enum, and each value owns its route name, its label and its icon, so the shell, the navigation bar and the route table cannot fall out of step:

```
enum AppTab { home, progress, workout, library, profile }

// lib/main.dart
for (final tab in AppTab.values) tab.routeName: (_) => AppShell(tab: tab),
```

Parameterised destinations are generated rather than registered, because a route like `/workout-detail/:id` is not a fixed string:

```
static const String routeName = '/workout-detail';
static String routeFor(String id) => '$routeName/$id';

// resolved in PlusOneApp.routeFor, which reads the id off the settings
case WorkoutDetailScreen.routeName:
  return MaterialPageRoute(builder: (_) => WorkoutDetailScreen(route: settings));
```

Data is passed as an id, not as an object. The list pushes `WorkoutDetailScreen.routeFor(workout.id)`; the detail screen reads the id from its route settings and asks the provider for the session (`context.watch<WorkoutProvider>().byId(id)`). That single decision is what keeps a detail screen alive across a change: when a set is ticked in the logger and the user walks back, the detail screen rebuilds from the provider rather than showing a copy of the session that no longer matches the store.

The last kind of movement is not a push at all. The gate in `lib/main.dart` chooses a window — splash while the session is being restored, the sign-in flow while signed out, the app while signed in — and each window carries a distinct `ValueKey`. Replacing the window instead of pushing onto it is what makes signing out leave no app screen on the back stack, and signing in as somebody else leave no store from the previous account listening.

What would be harder without it

Without the id-as-argument rule, a session would travel through constructors from the list to the logger to the summary, and every screen in the chain would hold a stale copy the moment a tick changed it. Without the window replacement, signing out would be a push, and the back button would walk into the account that just left.

7.2 STATE MANAGEMENT

What the app needed

Two kinds of shared state. Account state: is somebody signed in, who, and what is the app allowed to show. Training state: the sessions, the saved exercises, the profile, the weekly target, and every figure derived from them. Both are read by many screens and written by a few, which is exactly the shape `provider` exists for.

How it was built

PROVIDER	HOLDS	READ BY
`AuthProvider`	The session, a status (`checking` , `signedOut` , `signedIn`) and a busy flag; commands to create an account, sign in, continue offline, sign out and delete.	The gate in `main.dart` , the welcome and sign-in screens, the profile's account section.
`WorkoutProvider`	Sessions, saved exercises, profile and metrics, plus derived getters: the week's sessions, the focus session, the streak, the count of finished sessions, the previous sets for an exercise.	Home, progress, workout, library and profile — every tab.

Screens watch when they render a value and read when they only call a command. A tap handler that called `watch` would subscribe the screen to a rebuild it does not need; a build method that called `read` would never update. The distinction is small in code and large in behaviour, and it is applied consistently.

The store's lifetime is tied to the account, not to the app:

```
// lib/main.dart — one store per account, created and disposed by the widget
ChangeNotifierProvider(
  key: ValueKey(userId),
  create: (_) => openStore(userId)..load(),
)
```

The key is what makes signing in as someone else open their training rather than reuse the previous object, and it disposes the departed store with the widget that held it. A widget test asserts both halves, including that the old store throws when a listener is added after the switch.

What would be harder without it

Without a shared provider, the weekly figure would have to be passed from the shell to each tab, and the "last time" lookup would be repeated in the logger and the summary. That is not a style preference: passing state down a constructor chain is how two screens end up computing the same figure differently — which is precisely the defect described in Section 6, where the dashboard and the library each had their own definition of the week. With a single provider and a single getter, the second definition cannot exist without deleting the first.

Without the account-keyed provider, the app would either keep one store for the process (leaking one account's training into another's) or dispose nothing (leaving listeners on a dead notifier).

7.3 API INTEGRATION

What the app needed

A catalogue of exercises the app does not have to invent, searchable by name and muscle, that still works when the phone has no signal in a basement gym.

The API and its endpoints

FORM reads the public **wger** REST API (https://wger.de/api/v2/) through `package:http`. Reads need no API key.

```
GET https://wger.de/api/v2/exerciseinfo/?language=2&limit=60
Accept: application/json
timeout: 8 s
```

The catalogue holds 932 entries; the app requests the first page of sixty, which is more than a scrolling grid will reach in one session. Language 2 is English.

Sample response and parsing

A real response, abridged to the fields the app reads:

```
{
  "count": 932,
  "results": [
    {
      "id": 9,
      "category": { "id": 10, "name": "Abs" },
      "muscles": [
        { "id": 11, "name": "Biceps femoris", "name_en": "Hamstrings" }
      ],
      "muscles_secondary": [
        { "id": 10, "name": "Quadriceps femoris", "name_en": "Quads" }
      ],
      "equipment": [ { "id": 10, "name": "Kettlebell" } ],
      "translations": [
        {
          "language": 2,
          "name": "2 Handed Kettlebell Swing",
          "description": "<p>Two Handed Russian Style Kettlebell swing</p>"
        }
      ]
    }
  ]
}
```

`ExerciseApiClient._parse` maps one entry onto `LibraryExercise` — the same model the bundled data sets parse into. It prefers the English translation and falls back to the first one, so a German-only entry still appears; it joins muscle names, preferring `name_en` over the Latin name; it flattens equipment objects to names; and it strips HTML from descriptions, because the card shows plain text. Entries with no usable translation are dropped rather than rendered blank.

Loading, success and error states

STATE	WHAT THE USER SEES	TRIGGER
Loading	A progress indicator in the grid area; the header, search field and filter pills stay usable.	The request is in flight.
Success (network)	The catalogue, with the attribution line at the foot of the list.	HTTP 200 with at least one parsable result.
Fallback	The bundled catalogue plus a banner: “Offline catalogue — wger.de couldn't be reached. Retry”.	Timeout, socket error, non-200, invalid JSON, or an empty result list.
Error	An error state with a retry, only when both sources fail.	The bundled assets cannot be read either.

Failures are collapsed into one `ExerciseApiException` at the client boundary, so no screen deals in socket errors or status codes. The policy — network first, bundled second, error only if both fail — lives in `ExerciseCatalog.load`, which is tested on its own with a fake client: a client that throws must produce a bundled result with `isOffline` true, and a client that returns an empty list must do the same.

What would be harder without it

Without the API, the catalogue would be whatever shipped in the assets — correct but frozen, and blind to exercises the user actually wants. Without the fallback, the library would be empty in the one place the app is used most. Without the collapse at the boundary, every screen with a catalogue would carry its own timeout handling and its own error copy, and they would drift.

7.4 TESTS AND VERIFICATION

The suite holds **286 tests**. Three of them are worth naming because they test the parts that would be expensive to get wrong:

- **The migration.** A version-3 database is built by hand in the test — old tables, old primary keys, rows with no owner — and then opened by the current code. The test asserts that every row survived, that it belongs to the device account, and that the new primary key is `(userId, id)`. Rewinding `user_version` on a current database would prove only that the migration runs.
- **The account switch.** Signing in as somebody else must open their store and dispose the previous one. The test asserts the new store's contents and that adding a listener to the old store throws.
- **The counting rules.** A planned session and an uncompleted set must not move any figure. The tests state that directly, which is how the weekly-goal defect in Section 6 became a failing test rather than an opinion.

`dart format --set-exit-if-changed` and `flutter analyze` are clean, and every commit in the history was required to be green on its own.

7.5 THE DEVTOOLS CASE

The documented case is the release APK's size budget. Building with `--analyze-size` and opening the analysis in DevTools' App Size tool showed a 20 MB APK: 11.75 MB engine, 6.75 MB Dart AOT, 1.24 MB assets. Inside the AOT, `package:plus_one` — every screen, provider, repository and widget in the app — is **281 KB**, while `flutter_svg` and its parser stack are **≈380 KB** for five icons that total 1.1 KB on disk. The tool also

confirmed that Material icons tree-shake from 1.6 MB to 4.8 KB, so the icon font is not the cost it is often assumed to be.

The decision was to keep `flutter_svg` — 1.9% of the APK, and replacing the icon pipeline would be a design change disguised as an optimisation — and to record it, with the order in which it would be cut if the budget ever mattered. `docs/DEVTOOLS.md` also documents the frame that a 12 000-iteration PBKDF2 verify blocked on the UI isolate (105 ms, measured), and why that work now runs through `compute`.

SECTION 08

REFERENCES

PACKAGES (PUB.DEV)

PACKAGE	VERSION	USED FOR
`provider`	6.1.5+1	`ChangeNotifier` state shared across screens.
`sqflite`	2.4.4+1	The local SQLite database, its schema and migrations.
`path`	1.9.1	Platform-correct database paths.
`http`	1.6.0	The wger REST client.
`crypto`	3.0.7	HMAC-SHA256 for PBKDF2 password hashing.
`intl`	0.20.3	Date formatting (weekdays, month names, relative weeks).
`google_fonts`	9.0.0	Resolves Inter and Barlow Condensed from bundled assets.
`flutter_svg`	2.3.0	Lucide interface icons drawn as vectors.
`equatable`	2.1.0	Value equality on models, so tests compare meaning not identity.
`flutter_lints`	6.0.0	The analyzer rule set.
`sqflite_common_ffi`	2.4.3	Real SQLite in tests, without a device.
`flutter_launcher_icons`	0.14.4	Generates the Android icon and its adaptive variant.
`flutter_native_splash`	2.4.8	Generates the launch screen.

APIS, DATA SETS AND ASSETS

SOURCE	USE AND LICENCE
wger REST API	`/api/v2/exerciseinfo/` — the live exercise catalogue. CC BY-SA 3.0/4.0 per entry; attributed in the app and in `docs/ATTRIBUTION.md`.
exercemus/exercises	Bundled offline catalogue: tips, tempo and variations. MIT, © 2022 exercemus.
free-exercise-db	Bundled offline catalogue: images and level. The Unlicense (public domain).
Lucide	Interface icons. ISC licence.

Inter, Barlow Condensed	Typefaces, bundled as TTFs under the SIL Open Font License 1.1.

DOCUMENTATION AND SPECIFICATIONS CONSULTED

- Flutter documentation: Navigation and routing, State management with Provider, Internationalization and fonts — docs.flutter.dev.
- Flutter DevTools documentation: App Size tool and Performance view — docs.flutter.dev/tools/devtools.
- Dart documentation: Isolates and compute, Effective Dart — dart.dev.
- `provider`, `sqflite`, `http`, `crypto`, `google_fonts`, `flutter_svg` package documentation on pub.dev.
- RFC 8018, PKCS #5: Password-Based Cryptography Specification — the PBKDF2 definition (Algorithm 2).
- OWASP, Password Storage Cheat Sheet — iteration counts, salts and constant-time comparison.
- SQLite documentation: ALTER TABLE limits (why the v4 migration rebuilds tables rather than altering a primary key).

AI TOOLS

AI assistance was used during the project as a pair-programming and drafting assistant, under the author's direction: proposing implementations, writing boilerplate, reviewing diffs, and helping to draft documentation. Every change was reviewed, run and tested before it was committed, and the architecture, scope decisions, design mapping and the choices documented in this paper were made by the author. No AI tool generated the application's data, and no service handles the user's training data.

The agent used was **OpenCode** (open-source coding agent) running **DeepSeek V4.1 Flash Free**, in a terminal on Linux, with access to the repository and its test suite.

DESIGN

- Figma design file “Form design” — the source of truth for layout, type scale and colour; the frames used for the sign-in flow, the library, the workout screens and the profile are referenced by node in the commit history.